

CRAFTY CARBON R, CARBON/WHITE/RED, 2021

obj. č.: 477686507



Odporúčaná cena

7.799,00 EUR

Technické špecifikácie

vyrábané veľkosti

S 380mm / M 420mm / L 450mm / XL 490mm

hmotnosť

22 Kg

rám

Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.

vidlica

Fox 36 29 Float FIT GRIP EVOL Performance, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload

hlavové zloženie

Acros custom for 1-1/2 head tube, angular contact bearings 40x52x7, Internal cable routing

prehadzovačka

Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

radenie

Sram Trigger NX Eagle, 12s, X-Actuation 1:1, single click

brzdové páčky

Sram G2 RSC, SwingLink and lever pivot bearings, tools-free reach and contact point adjust

kľučky

Race Face Aeffect, 165mm

riadičlá

Onoff Krypton 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5 upsweep, 31.8mm barbare Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

predstavec


Onoff Krypton FG 30mm, 6061 forged alloy, 31.8mm barbare

sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm

sedlo Fizik Antares R7	náboj předný DT 370, Boost 15x110mm, IS 6 bolts
náboj zadný DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts	reťaz Sram NX Eagle, 12s, Powerlock
kazeta Sram XG-1230, 11-50T, 12s	drôty DT Hybrid SP, straightpull
ráfiky DT Swiss H1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes	plášte Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
obj.c. 010.21259	tlmič Fox Float DPS Performance, 205x65mm. Settings: Compression 3 positions lever, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
predná brzda Sram G2 RSC, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads	zadná brzda Sram G2 RSC, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
plášť zadný Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead	nastavenia tlmiče Medium compression, Medium rebound, 0.4 volume spacer
prevodník Sram X-Sync 2 Eagle 34T, alloy, narrow-wide, 104 BCD	pätka k preházovačce Mondraker M068
motor + batérie Bosch Performance Line CX Cruise (25Km/h) GEN4, computer Bosch Kiox, Bosch Powertube 625Wh	

Geometria

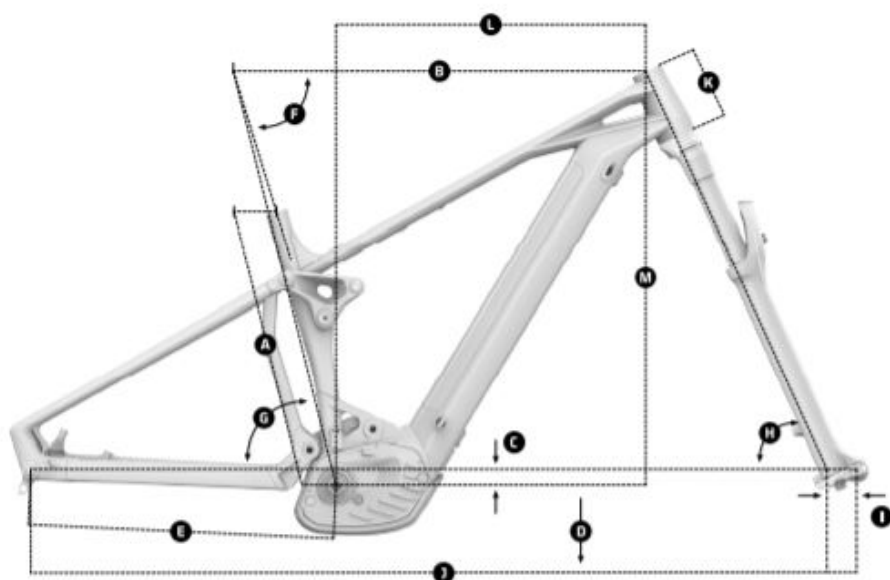

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	490 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Length	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

CRAFTY R, BLACK/ORANGE, 2021

obj. č.: 477686507



Odporúčaná cena

5.999,00 EUR

Technické špecifikácie

vyrábané veľkosti

S 380mm / M 420mm / L 450mm / XL 490mm

hmotnosť

24,9 Kg

rám

Crafty 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal removable battery with integrated alloy cover, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.

vidlica

Fox 38 29 Float FIT GRIP EVOL Performance, 160mm, e-bike tuned, tapered steerer tube, Boost 15x110mm axle, 44mm offset. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload

hlavové zloženie

Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45

prehadzovačka

Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

radenie

Sram Trigger NX Eagle, 12s, X-Actuation 1:1, single click

brzdové páčky

Sram G2 R, tool-free reach adjust

kľučky

Race Face Aeffect ebike, 165mm

riadidlá

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbare Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

predstavec

Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm barbare

sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm

sedlo


SDG BEL-AIR 3.0, EVA foam, steel rails

náboj predný

DT 370, Boost 15x110mm, IS 6 bolts

náboj zadný DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts	reťaz Sram SX Eagle, 12s, Powerlock
kazeta Sram PG-1210, 11-50T, 12s	drôty DT Hybrid SP, straightpull
ráfiky DT Swiss H1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes	plášte Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
obj.c. 010.21247	tlmič Fox Float DPX2 LV EVOL Performance, 205x65mm. Settings: compression 3 positions lever, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
predná brzda Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads	zadná brzda Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
plášť zadný Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead	nastavenia tlmiče CEC001 compression, Medium rebound, 0.2 volume spacer
prevodník Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD	pätka k prehazovačce Mondraker M068
motor + batérie Bosch Performance Line CX Cruise (25Km/h) GEN4, computer Bosch Kiox, Bosch Powertube 625Wh	

Geometria

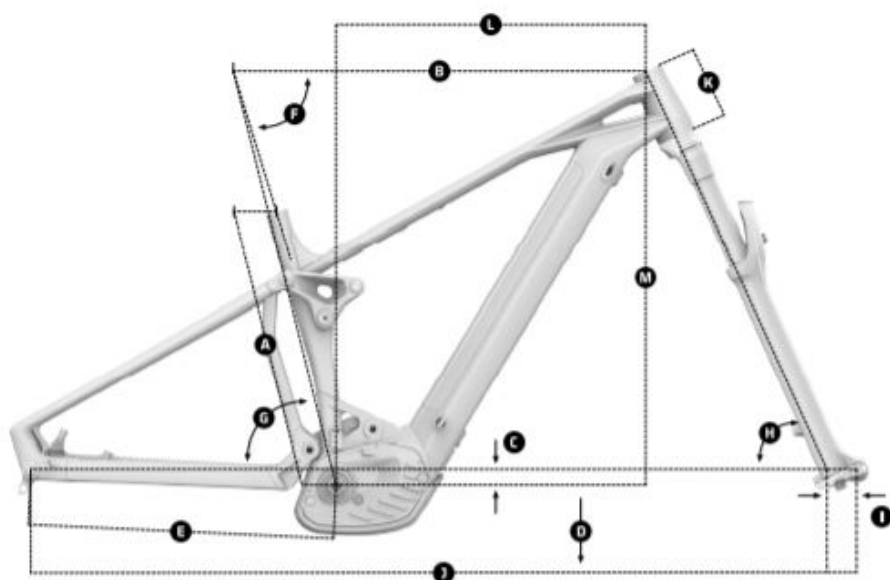

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	490 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Length	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

CRAFTY R, BLACK/WHITE, 2021

obj. č: 477686507



Odporúčaná cena

5.999,00 EUR

Technické špecifikácie

vyrábané veľkosti

S 380mm / M 420mm / L 450mm / XL 490mm

hmotnosť

24,9 Kg

rám

Crafty 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal removable battery with integrated alloy cover, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.

vidlica

Fox 38 29 Float FIT GRIP EVOL Performance, 160mm, e-bike tuned, tapered steerer tube, Boost 15x110mm axle, 44mm offset. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload

hlavové zloženie

Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45

prehadzovačka

Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

radenie

Sram Trigger NX Eagle, 12s, X-Actuation 1:1, single click

brzdové páčky

Sram G2 R, tool-free reach adjust

kľučky

Race Face Aeffect ebike, 165mm

riadidlá

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbare Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

predstavac

Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm barbare

sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm

sedlo


SDG BEL-AIR 3.0, EVA foam, steel rails

náboj predný

DT 370, Boost 15x110mm, IS 6 bolts

náboj zadný DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts	reťaz Sram SX Eagle, 12s, Powerlock
kazeta Sram PG-1210, 11-50T, 12s	drôty DT Hybrid SP, straightpull
ráfiky DT Swiss H1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes	plášte Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
obj.c. 010.21241	tlmič Fox Float DPX2 LV EVOL Performance, 205x65mm. Settings: compression 3 positions lever, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
predná brzda Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads	zadná brzda Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
plášť zadný Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead	nastavenia tlmiče CEC001 compression, Medium rebound, 0.2 volume spacer
prevodník Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD	pätka k prehazovačke Mondraker M068
motor + batérie Bosch Performance Line CX Cruise (25Km/h) GEN4, computer Bosch Kiox, Bosch Powertube 625Wh	

Geometria

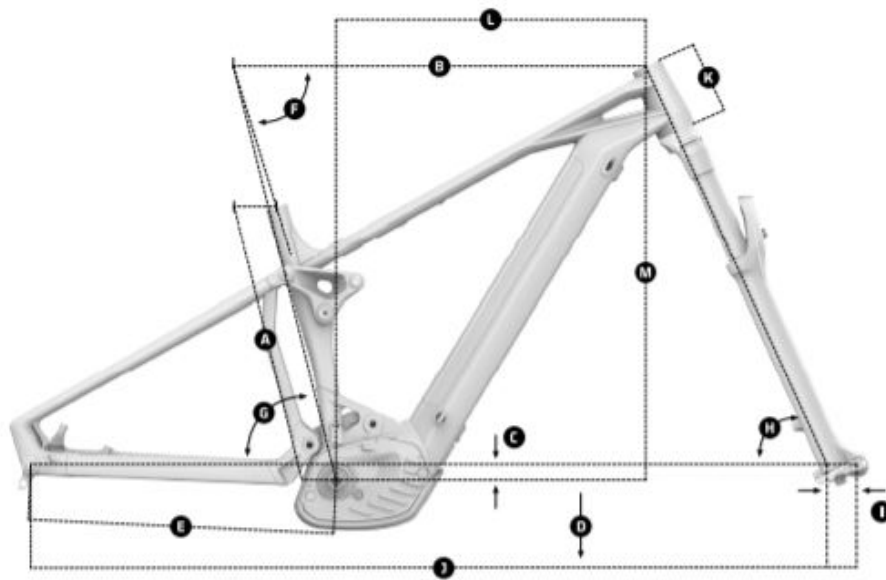

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	490 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Length	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

CRAFTY RR, SILVER/BLACK/RED, 2021

obj. č.: 477686507



Odporúčaná cena

6.999,00 EUR

Technické špecifikácie

vyrábané veľkosti

S 380mm / M 420mm / L 450mm / XL 490mm

hmotnosť

24,6 Kg

rám

Crafty 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal removable battery with integrated alloy cover, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.

vidlica

Fox 38 29 Float FIT4 EVOL Factory Kashima, 160mm, e-bike tuned, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload

hlavové zloženie

Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45

prehadzovačka

Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

radenie

Sram Trigger GX Eagle, 12s, X-Actuation 1:1, single click

brzdové páčky

Sram Code R, tool-free reach adjust

kľučky

Race Face Aeffect ebike, 165mm

riadidlá

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5upsweep, 31.8mm barbare Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

predstavce

Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm barbare

sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm

sedlo


SDG BEL-AIR 3.0, EVA foam, alloy rails

náboj predný

DT 370, Boost 15x110mm, IS 6 bolts

náboj zadný DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts	refaz Sram NX Eagle, 12s, Powerlock
kazeta Sram XG-1230, 11-50T, 12s	drôty DT Hybrid SP, straightpull
ráfiky DT Swiss H1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes	plášte Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
obj.c. 010.21255	tlmič Fox Float DPX2 LV EVOL Factory Kashima, 205x65mm. Settings: compression 3 positions lever, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
predná brzda Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads	zadná brzda Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads
plášť zadný Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead	nastavenia tlmiče CEC001 compression, Medium rebound, 0.2 volume spacer
prevodník Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD	pätka k prehadzovačke Mondraker M068
motor + batérie Bosch Performance Line CX Cruise (25Km/h) GEN4, computer Bosch Kiox, Bosch Powertube 625Wh	

Geometria

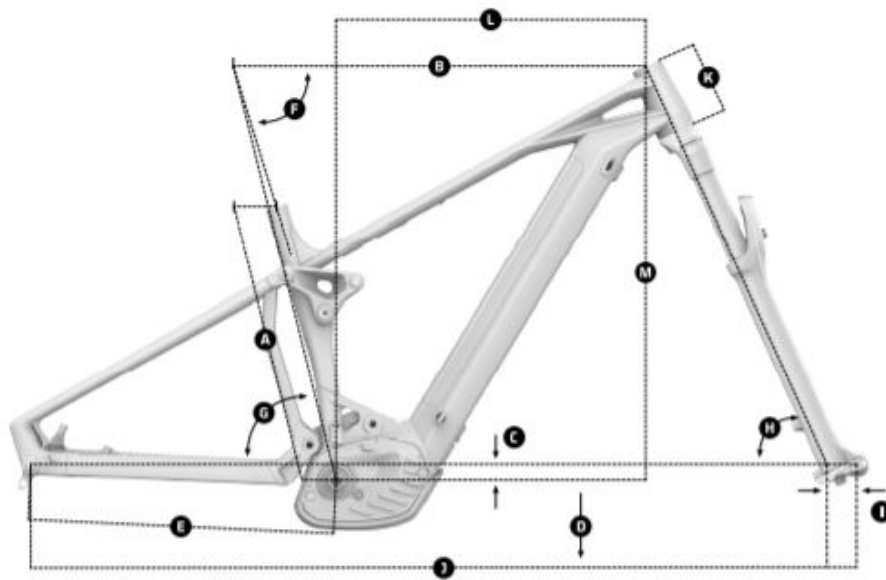

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	490 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Length	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

FOXY, BLACK/ORANGE/GREY, 2021

obj. č: 477686507



Odporúčaná cena

3.499,00 EUR

Technické špecifikácie

vyrábané veľkosti

S 380mm / M 420mm / L 470mm / XL 510mm

hmotnosť

15,5 Kg

rám

Foxy 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 150mm travel, Forward Geometry, one piece Monoblock upper link, Boost 12x148mm rear axle, 73mm BSA bottom bracket, dedicated 1x drivetrain design, telescopic seatpost internal routing, MAX capacity sealed bearings, ISCG 05

vidlica

Fox 36 29 Float FIT GRIP EVOL Rhythm, 160mm, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: sweep adjust compression, low-speed rebound, air preload

hlavové zloženie

Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45

prehadzovačka

Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

radenie

Sram Trigger SX Eagle, 12s, X-Actuation 1:1

brzdové páčky

Sram G2 R, tool-free reach adjust

kľučky

Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S/M size: 170mm, L/XL size: 175mm

stredové zloženie

Sram DUB BSA, sealed bearings, 73mm

riadidlá

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5° upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm

predstavec

Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm barbare

sedlovka


Onoff Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M size 387x125mm, L size: 425x150mm, XL size: 465x170mm

sedlo

SDG BEL-AIR 3.0, LPU foam, steel rails

náboj předný Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts	náboj zadný Formula MST148S-4SB, Boost 12x148mm, sealed bearings, IS 6 bolts
refáz Sram SX Eagle, 12s, Powerlock	kazeta Sram PG-1210, 11-50T, 12s
drôty CN round stainless steel	ráfiky MDK-EP1 29 TLR ASY, asymmetrical rim, 30mm internal width, tubeless ready, 32 spokes
plášte Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead	obj.c. 010.21073
tlmič Fox Float DPS LV EVOL Performance, 205x62.5mm. Settings: rebound, 3-position compression adjustment (Open/Mid/Lock), air preload. Trunnion top mount, 22.2x10mm bottom bushings	predná brzda Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
zadná brzda Sram G2 R, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pads	plášť zadný Maxxis Aggressor 29x2.3, tubeless ready, dual compound, Exo protection, 60TPI, folding bead
nastavenia tlmiče Light compression, extralight rebound, air volume spacer 0.6	prevodník 32T, steel, X-Sync 2
pätka k přehazovačce Mondraker M068	

Geometria

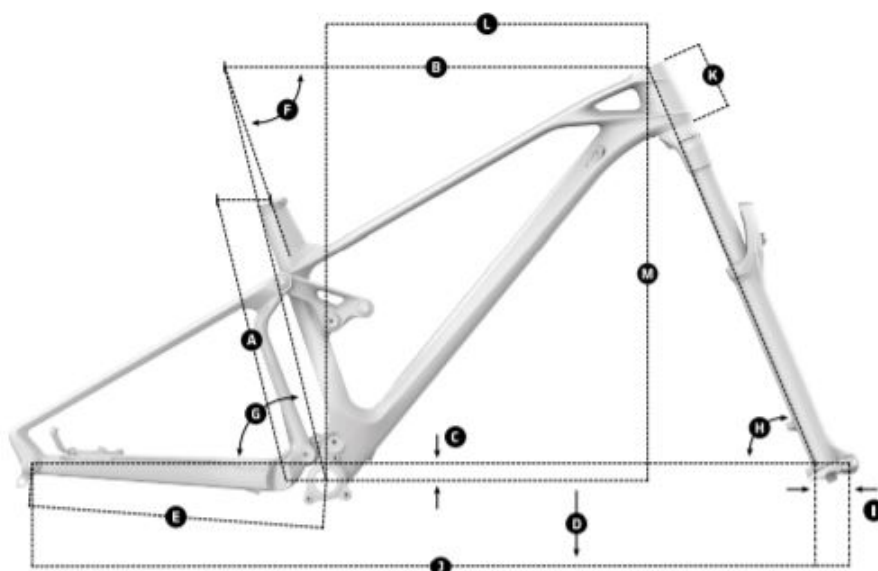

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	470 mm	510 mm
B Top Tube Length	606 mm	629 mm	654 mm	678 mm
C Bottom Bracket Drop	-21 mm	-21 mm	-21 mm	-21 mm
D Bottom Bracket Height	352 mm	352 mm	352 mm	352 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	70.5°	70.5°	70.5°	70.5°
G Seat Tube Angle, Effective	75.5°	75.5°	75.5°	75.5°
H Head Tube Angle	66°	66°	66°	66°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1187 mm	1210 mm	1236 mm	1262 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	605 mm	614 mm	628 mm	642 mm

F-PODIUM CARBON, CARBON/ORANGE/GREY, 2021

obj. č: 477686507



Odporúčaná cena


4.499,00 EUR

Technické špecifikácie

vyrábané veľkosti S 390mm / M 420mm / L 470mm / XL 510mm	hmotnosť 10,9 Kg
rám F-Podium 29 Stealth Air Full Carbon, XCO Optimized Zero Suspension System, 100mm, XC Forward Geometry, Carbon Monoblock upper link, BSA bottom bracket, tapered head tube, HHG internal cable routing, dedicated 1X drivetrain design, Boost 12x148mm rear axle, shock mudguard, postmount rear brake mount.	vidlica Rockshox SID SL Select RL 29, 100mm, Charger, Debonair, tapered steerer tube, Boost 15x110mm axle, 32mm aluminum stanchions, offset 44mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload
hlavové zloženie Acros AZX-239 R1 Block Lock, ZS44/28.6 top, ZS56/40 bottom	prehadzovačka Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
radenie Sram Trigger SX Eagle, 12s, X-Actuation 1:1	brzdové páčky Sram Level T, Direct Link actuation, tooled reach adjust, lever pivot bushings
kľučky Truvativ Stylo 6K Eagle, 12s, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm	stredové zloženie Sram DUB BSA, sealed bearings, 73mm
riadidlá Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 760mm, 9 backsweep, 0 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm	predstavec MDK, 6061 T6 Alloy, 31.8mm barbare, rise: +/-5, length: sizes S/M: 50mm, size L: 60mm, size XL: 70mm
sedlovka Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm	sedlo Fizik Antares R7

náboj predný DT 370, Boost 15x110mm, IS 6 bolts	náboj zadný DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts, MS freehub
reťaz Sram SX Eagle, 12s, Powerlock	kazeta Sram PG-1230, 11-50T, 12s
drôty DT Champion, straightpull	ráfiky DT Swiss X1900 Spline 29, 25mm internal width, sleeved aluminum, tubeless ready, 28 spokes
plášte Maxxis Rekon Race 29x2.25, EXO protection, tubeless ready, 120TPI, folding bead	obj.c. 010.21037
tlmič Rockshox SID Select+ RLR Debonair, 185x47.5mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings	predná brzda Sram Level T, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad
zadná brzda Sram Level T, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad	plášť zadný Maxxis Rekon Race 29x2.25, EXO protection, tubeless ready, 120TPI, folding bead
nastavenia tlmiče Light compression, medium rebound, Lockout 430, 1 Token	prevodník 34T, steel, X-Sync 2
pätka k prehadzovačke Sram UDH	

Geometria

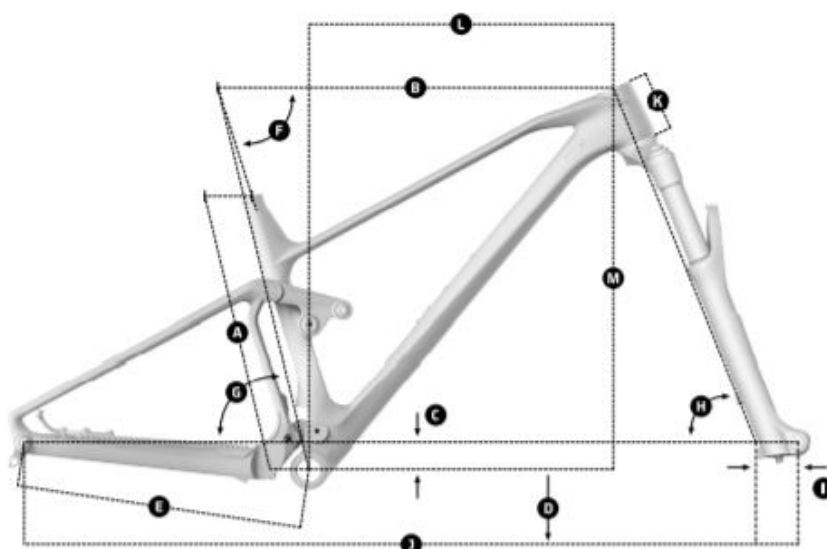

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	390 mm	420 mm	470 mm	510 mm
B Top Tube Length	580 mm	600 mm	625 mm	650 mm
C Bottom Bracket Drop	-40 mm	-40 mm	-40 mm	-40 mm
D Bottom Bracket Height	325 mm	325 mm	325 mm	325 mm
E Chainstay Length	432 mm	432 mm	432 mm	432 mm
F Seat Tube Angle, Actual	72°	72°	72°	72°
G Seat Tube Angle, Effective	76.5°	76.5°	76.5°	76.5°
H Head Tube Angle	68°	68°	68°	68°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1132 mm	1153 mm	1177 mm	1203 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	440 mm	460 mm	480 mm	500 mm
M Stack	570 mm	575 mm	584 mm	598 mm

CHASER, BLACK, 2021

obj. č.: 477686507



Odporúčaná cena

4.999,00 EUR

Technické špecifikácie

vyrábané veľkosti

S 380mm / M 420mm / L 450mm / XL 490mm

hmotnosť

24,8 Kg

rám

Chaser 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers, shock mudguard

vidlica

RockShox 35 Silver TK 29, 160mm, TurnKey, Solo Air, tapered steerer tube, Boost 15x110mm axle, 35mm steel stanchions, 44mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload

hlavové zloženie

Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45

prehadzovačka

Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

radenie

Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click

brzdové páčky

Sram G2 R, tool-free reach adjust

kľučky

Race Face Aeffect ebike, 165mm

riadičlá

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm

predstavec

Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm barbare

sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm

sedlo


Mondraker e-MTB custom design

náboj predný

Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts

náboj zadný Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts	reťaz Sram SX Eagle, 12s, Powerlock
kazeta Sram PG-1210, 11-50T, 12s	drôty CN round stainless steel
ráfiky MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes	plášte Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
obj.c. 010.21225	tlmič RockShox Deluxe Select R Debonair, 205x65mm. Settings: Low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
predná brzda Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads	zadná brzda Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
plášť zadný Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead	nastavenia tlmiče Light compression, Light rebound, 1 Token
prevodník Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD	pätka k prehazovačce Mondraker M068
motor + batérie Bosch Performance Line CX Cruise (25Km/h) GEN4, computer Bosch Purion, Bosch Powertube 625Wh	

Geometria

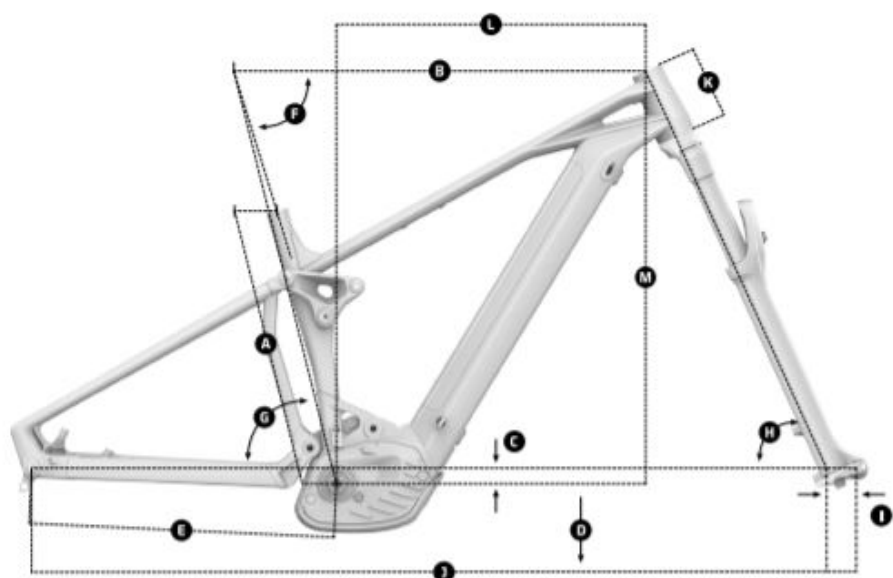

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	490 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Length	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

CHASER, RED, 2021

obj. č.: 477686507



Odporúčaná cena

4.999,00 EUR

Technické špecifikácie

vyrábané veľkosti

S 380mm / M 420mm / L 450mm / XL 490mm

hmotnosť

24,8 Kg

rám

Chaser 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers, shock mudguard

vidlica

RockShox 35 Silver TK 29, 160mm, TurnKey, Solo Air, tapered steerer tube, Boost 15x110mm axle, 35mm steel stanchions, 44mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload

hlavové zloženie

Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45

prehadzovačka

Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

radenie

Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click

brzdové páčky

Sram G2 R, tool-free reach adjust

kľučky

Race Face Aeffect ebike, 165mm

riadidlá

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm

predstavec

Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm barbare

sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm

sedlo


Mondraker e-MTB custom design

náboj predný

Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts

náboj zadný Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts	reťaz Sram SX Eagle, 12s, Powerlock
kazeta Sram PG-1210, 11-50T, 12s	drôty CN round stainless steel
ráfiky MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes	plášte Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
obj.c. 010.21233	tlmič RockShox Deluxe Select R Debonair, 205x65mm. Settings: Low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
predná brzda Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads	zadná brzda Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
plášť zadný Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead	nastavenia tlmiče Light compression, Light rebound, 1 Token
prevodník Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD	pätka k prehazovačce Mondraker M068
motor + batérie Bosch Performance Line CX Cruise (25Km/h) GEN4, computer Bosch Purion, Bosch Powertube 625Wh	

Geometria

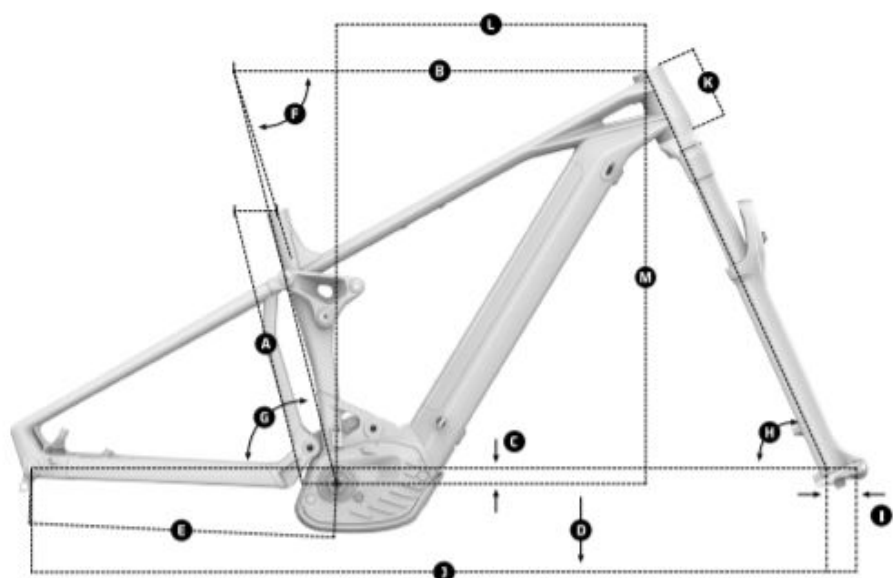

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	490 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Length	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

CHRONO CARBON R, CARBON/SILVER/RED, 2021

obj. č.: 477686507



Odporúčaná cena

2.499,00 EUR

Technické špecifikácie

vyrábané veľkosti

S 395mm / M 430mm / L 470mm / XL 520mm

hmotnosť

9,9 Kg

rám

Chrono 29 Stealth full Carbon, XC Forward Geometry, 73mm BSA bottom bracket, tapered head tube, HHG Internal Cable routing, Boost 12x148mm rear axle, Comfort Flat chainstays (Flatstays) design

vidlica

Rockshox SID SL Select RL 29, 100mm, Charger, Debonair, tapered steerer tube, Boost 15x110mm axle, 32mm aluminum stanchions, offset 44mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload

hlavové zloženie

Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45

prehadzovačka

Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

radenie

Sram Trigger SX Eagle, 12s, X-Actuation 1:1

brzdové páčky

Sram Level, tooled reach adjust, lever pivot bushings

kľučky

Truvativ Stylo 6K Eagle, 12s, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm

stredové zloženie

Sram DUB BSA, sealed bearings, 73mm

riadidlá

Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm

predstavec

MDK, 6061 T6 Alloy, 31.8mm barbare, rise: +/-5, length: size S: 60mm, size M: 70mm, size L: 80mm, size XL: 90mm

sedlovka


Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm

sedlo

Mondraker XC Series, steel rail

náboj předný DT 370, Boost 15x110mm, IS 6 bolts	náboj zadný DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts
reťaz Sram SX Eagle, 12s, Powerlock	kazeta Sram PG-1230, 11-50T, 12s
drôty DT Champion, straightpull	ráfiky DT Swiss X1900 Spline 29, 25mm internal width, sleeved aluminum, tubeless ready, 28 spokes
plášte Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead	obj.c. 010.21017
predná brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad	zadná brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad
plášť zadný Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead	prevodník 34T, steel, X-Sync 2
pätka k přehazovačce Mondraker M068	

Geometria

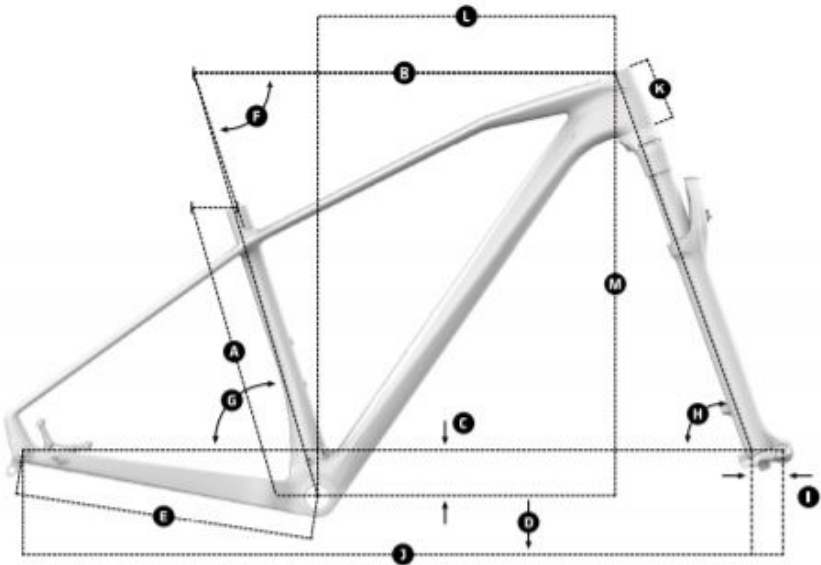

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	395 mm	430 mm	470 mm	520 mm
B Top Tube Length	590 mm	610 mm	630 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	430 mm	430 mm	430 mm	430 mm
F Seat Tube Angle, Actual	72°	72°	72°	72°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	70°	70°	70°	70°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1086 mm	1106 mm	1127 mm	1148 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	411 mm	430 mm	447 mm	463 mm
M Stack	605 mm	610 mm	619 mm	632 mm

CHRONO CARBON, CARBON/ORANGE/GREY, 2021

obj. č.: 477686507



Odporúčaná cena

2.099,00 EUR

Technické špecifikácie

vyrábané veľkosti

S 395mm / M 430mm / L 470mm / XL 520mm

hmotnosť

11,3 Kg

rám

Chrono 29 Stealth full Carbon, XC Forward Geometry, 73mm BSA bottom bracket, tapered head tube, HHG Internal Cable routing, Boost 12x148mm rear axle, Comfort Flat chainstays (Flatstays) design

vidlica

RockShox Judy Gold RL 29, 100mm, Motion control, Solo Air, tapered steerer tube, Boost 15x110mm axle, 30mm aluminum stanchions, offset 51mm. Settings: Onelock 2 pos remote compression (open/lock), rebound, air preload

hlavové zloženie

Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45

prehadzovačka

Sram NX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

radenie

Sram Trigger SX Eagle, 12s, X-Actuation 1:1

brzdové páčky

Sram Level, tooled reach adjust, lever pivot bushings

kľučky

Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm

stredové zloženie

Sram DUB BSA, sealed bearings, 73mm

riadidlá

Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbore Onoff Twin, 1lock-on, 135mm

predstavec

MDK, 6061 T6 Alloy, 31.8mm barbore, rise: +/-5, length: size S: 60mm, size M: 70mm, size L: 80mm, size XL: 90mm

sedlovka


Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm

sedlo

Mondraker XC Series, steel rail

náboj předný Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts	náboj zadný Formula MST148S-4SB, Boost 12x148mm, sealed bearings, IS 6 bolts
reřaz Sram SX Eagle, 12s, Powerlock	kazeta Sram PG-1230, 11-50T, 12s
drřoty CN round stainless steel	řáfiky MDK-XP1 29 TLR, 25mm internal width, tubeless ready, 32 spokes
plářte Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead	obj.c. 010.21013
předná brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad	zadná brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad
plářř zadný Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead	prevodník 34T, steel, X-Sync 2
přátka k přehazovačce Mondraker M068	

Geometria

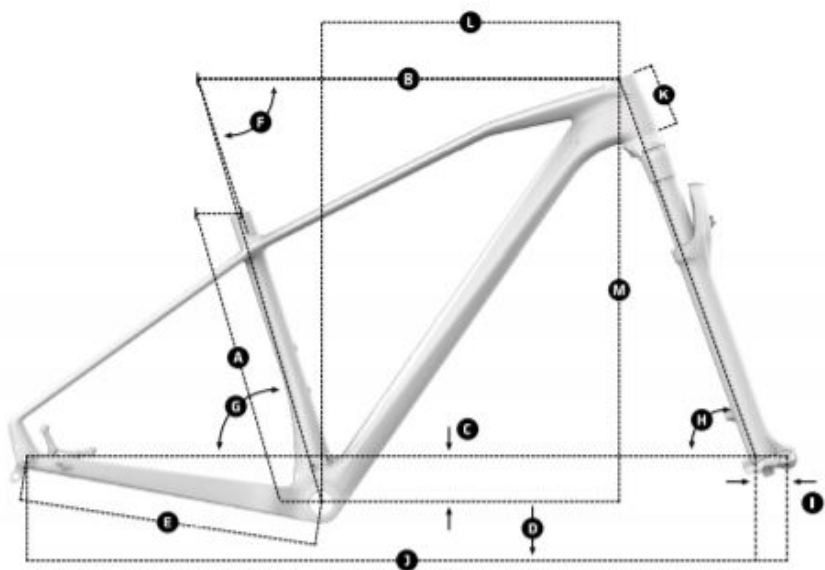

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	395 mm	430 mm	470 mm	520 mm
B Top Tube Length	590 mm	610 mm	630 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	430 mm	430 mm	430 mm	430 mm
F Seat Tube Angle, Actual	72°	72°	72°	72°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	70°	70°	70°	70°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1086 mm	1106 mm	1127 mm	1148 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	411 mm	430 mm	447 mm	463 mm
M Stack	605 mm	610 mm	619 mm	632 mm

CHRONO, BLACK/RED/BLUE, 2021

obj. č.: 477686507



Odporúčaná cena


1.199,00 EUR

Technické špecifikácie

vyrábané veľkosti S 395mm / M 430mm / L 470mm / XL 520mm	hmotnosť 12,7 Kg
rám Chrono 29 6061 Xtralite Alloy butted, XC Forward Geometry, 73mm BSA bottom bracket, tapered head tube, HHG Internal Cable Routing, Boost 12x148mm rear axle	vidlica RockShox Judy Silver TK 29, 100mm, TurnKey, Solo Air, tapered steerer tube, 9x100mm axle, 30mm steel stanchions, 46mm offset. Settings: Poplock 2 pos remote compression (open/lock), rebound, air preload
hlavové zloženie Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45	prehadzovačka Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
radenie Sram Trigger SX Eagle, 12s, X-Actuation 1:1	brzdové páčky Sram Level, tooled reach adjust, lever pivot bushings
kľučky Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm	stredové zloženie Sram DUB BSA, sealed bearings, 73mm
riadidlá Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm	predstavec Onoff Sulfur, 6061 T6 Alloy, 31.8mm barbare, rise: +/-7, length: sizes S/M: 60mm, size L: 80mm, size XL: 90mm
sedlovka Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm	sedlo Mondraker XC Series, steel rail

náboj předný Formula DC20LW, 9x100mm, cup cone ball bearings, IS 6 bolts	náboj zadný Formula MST148S-4SB, Boost 12x148mm, sealed bearings, IS 6 bolts, MS freehub
reřaz Sram SX Eagle, 12s, Powerlock	kazeta Sram PG-1210, 11-50T, 12s
drřoty CN round stainless steel	rřafiky MDK-XP1 29 TLR, 25mm internal width, tubeless ready, 32 spokes
plřřste Maxxis Ikon 29x2.20, 60TPI, wire bead	obj.c. 011.21001
přednř brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad	zadnř brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad
plřřřt zadný Maxxis Ikon 29x2.20, 60TPI, wire bead	prevodník 34T, steel, X-Sync 2
přřtka k přřhazovařce Mondraker M068	

Geometria

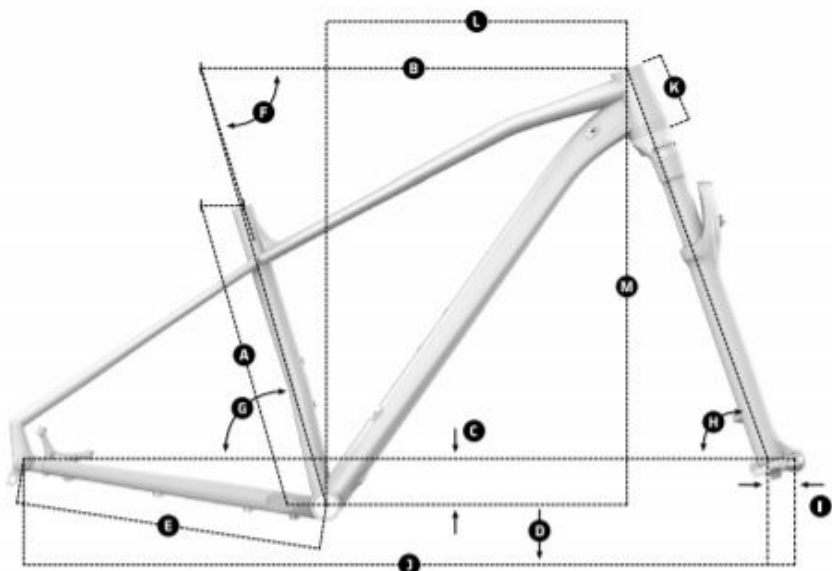

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	395 mm	430 mm	470 mm	520 mm
B Top Tube Length	590 mm	610 mm	630 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	72.5°	72.5°	72.5°	72.5°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	70°	70°	70°	70°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1087 mm	1107 mm	1127 mm	1148 mm
K Head Tube Length	100 mm	100 mm	110 mm	125 mm
L Reach	406 mm	426 mm	444 mm	460 mm
M Stack	618 mm	618 mm	628 mm	642 mm

CHRONO, WHITE/ORANGE/BLUE, 2021

obj. č: 477686507



Odporúčaná cena

1.199,00 EUR

Technické špecifikácie

vyrábané veľkosti

S 395mm / M 430mm / L 470mm / XL 520mm

hmotnosť

12,7 Kg

rám

Chrono 29 6061 Xtralite Alloy butted, XC Forward Geometry, 73mm BSA bottom bracket, tapered head tube, HHG Internal Cable Routing, Boost 12x148mm rear axle

vidlica

RockShox Judy Silver TK 29, 100mm, TurnKey, Solo Air, tapered steerer tube, 9x100mm axle, 30mm steel stanchions, 46mm offset. Settings: Poplock 2 pos remote compression (open/lock), rebound, air preload

hlavové zloženie

Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45

prehadzovačka

Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

radenie

Sram Trigger SX Eagle, 12s, X-Actuation 1:1

brzdové páčky

Sram Level, tooled reach adjust, lever pivot bushings

kľučky

Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm

stredové zloženie

Sram DUB BSA, sealed bearings, 73mm

riadidlá

Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm

predstavec

Onoff Sulfur, 6061 T6 Alloy, 31.8mm barbare, rise: +/-7, length: sizes S/M: 60mm, size L: 80mm, size XL: 90mm

sedlovka


Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm

sedlo

Mondraker XC Series, steel rail

náboj předný Formula DC20LW, 9x100mm, cup cone ball bearings, IS 6 bolts	náboj zadný Formula MST148S-4SB, Boost 12x148mm, sealed bearings, IS 6 bolts, MS freehub
reřaz Sram SX Eagle, 12s, Powerlock	kazeta Sram PG-1210, 11-50T, 12s
drřoty CN round stainless steel	rřafiky MDK-XP1 29 TLR, 25mm internal width, tubeless ready, 32 spokes
plřřste Maxxis Ikon 29x2.20, 60TPI, wire bead	obj.c. 011.21005
přednř brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad	zadnř brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad
plřřřt zadný Maxxis Ikon 29x2.20, 60TPI, wire bead	prevodník 34T, steel, X-Sync 2
přřtka k přřhazovařce Mondraker M068	

Geometria

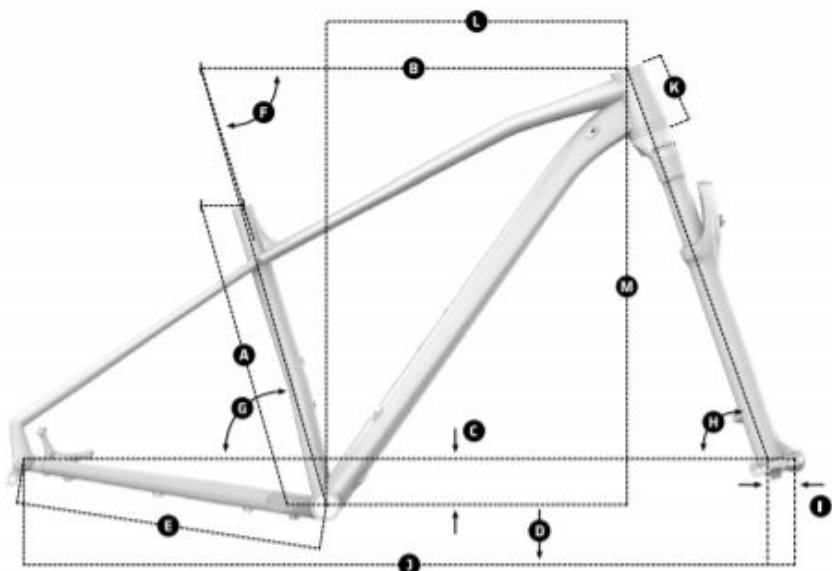

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	395 mm	430 mm	470 mm	520 mm
B Top Tube Length	590 mm	610 mm	630 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	72.5°	72.5°	72.5°	72.5°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	70°	70°	70°	70°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1087 mm	1107 mm	1127 mm	1148 mm
K Head Tube Length	100 mm	100 mm	110 mm	125 mm
L Reach	406 mm	426 mm	444 mm	460 mm
M Stack	618 mm	618 mm	628 mm	642 mm

PODIUM CARBON, CARBON/WHITE/RED, 2021

obj. č.: 477686507



Odporúčaná cena


3.699,00 EUR

Technické špecifikácie

vyrábané veľkosti S 390mm / M 420mm / L 470mm / XL 510mm	hmotnosť 9,3 Kg
rám Podium 29 Stealth Air Carbon, XC Forward Geometry, BSA bottom bracket, tapered head tube, HHG internal cable routing, Boost 12x148mm rear axle, dedicated 1X drivetrain design, Flatmount brake compatible,	vidlica Rockshox SID SL Select RL 29, 100mm, Charger, Debonair, tapered steerer tube, Boost 15x110mm axle, 32mm aluminum stanchions, offset 44mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload
hlavové zloženie Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45	prehadzovačka Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
radenie Sram Trigger GX Eagle, 12s, X-Actuation 1:1	brzdové páčky Sram Level TLM, Direct Link actuation, tooled reach adjust, lever pivot bushings
kľučky Truvativ Stylo 7K Eagle, Boost, DUB axle, Direct mount chain ring, S size: 170mm, M/L/XL size: 175mm	stredové zloženie Sram DUB BSA, sealed bearings, 73mm
riadidlá Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm	predstavec MDK, 6061 T6 Alloy, 31.8mm barbare, rise: +/-5, length: sizes S/M: 60mm, size L: 70mm, size XL: 80mm
sedlovka Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm	sedlo Fizik Antares R7

náboj předný DT 370, Boost 15x110mm, IS 6 bolts	náboj zadný DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts, XD freehub
reťaz Sram NX Eagle, 12s, Powerlock	kazeta Sram XG-1275, 10-50T, 12s
drôty DT Champion, straightpull	ráfiky DT Swiss X1900 Spline 29, 25mm internal width, sleeved aluminum, tubeless ready, 28 spokes
plášte Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead	obj.c. 010.21128
predná brzda Sram Level TLM, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad	zadná brzda Sram Level TLM, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad
plášť zadný Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead	prevodník 34T, CNC-machined alloy, X-SYNC 2
pätka k prehadzovačke Sram UDH	

Geometria

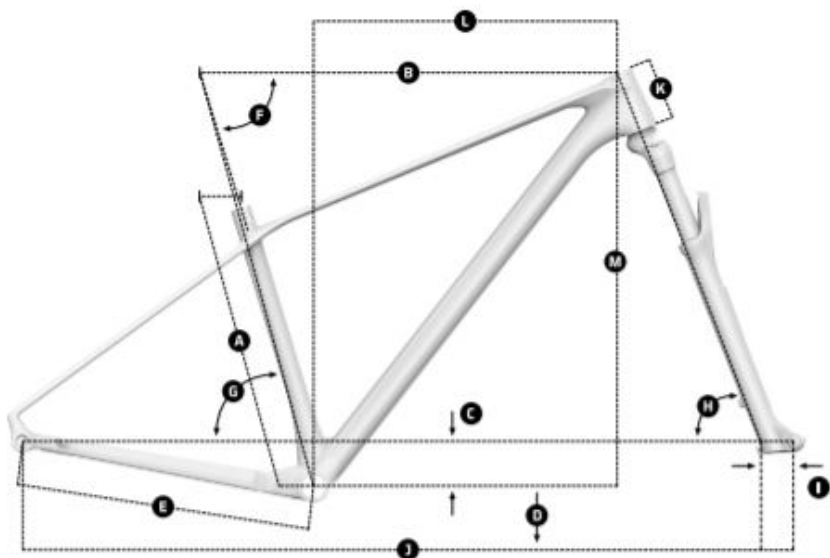

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	390 mm	420 mm	470 mm	510 mm
B Top Tube Length	590 mm	611mm	632 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	430 mm	430 mm	430 mm	430 mm
F Seat Tube Angle, Actual	73°	73°	73°	73°
G Seat Tube Angle, Effective	74.5°	74.5°	74.5°	74.5°
H Head Tube Angle	68.5°	68.5°	68.5°	68.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1107 mm	1128 mm	1150 mm	1170 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	425 mm	444 mm	463 mm	477 mm
M Stack	598 mm	602 mm	611 mm	625 mm

PRIME, BLACK/RED, 2021

obj. č: 477686507



Odporúčaná cena


3.499,00 EUR

Technické špecifikácie

vyrábané veľkosti XS 380mm / S 390mm / M 430mm / L 470mm / XL 510mm	hmotnosť 21,9 Kg
rám Prime Xtralite 6061 Full Butted Alloy, Forward Geometry, internal removable battery, tapered head tube, Boost 12x148mm rear axle, integrated dropout speed sensor	vidlica RockShox Recon Silver RL 29, 120mm, Motion control, Solo Air, tapered steerer tube, Boost 15x110mm axle, 42mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload
hlavové zloženie Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45	prehadzovačka Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
radenie Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click	brzdové páčky Sram Level T, Direct Link actuation, tooled reach adjust, lever pivot bushings
kľučky Race Face Aeffect ebike, 165mm	riadidlá Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm
predstavec Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm barbare	sedlovka Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm
sedlo Mondraker e-MTB custom design	náboj predný Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts

náboj zadný Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts	reťaz Sram SX Eagle, 12s, Powerlock
kazeta Sram PG-1210, 11-50T, 12s	drôty CN round stainless steel
ráfiky MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes	plášte Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
obj.c. 010.21216	predná brzda Sram Level T, 2 piece caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pad
zadná brzda Sram Level T, 2 piece caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pad	plášť zadný Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
prevodník Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD	pätka k prehadzovačce Mondraker M068
motor + batérie Bosch Performance Line CX Cruise (25Km/h) GEN4, computer Bosch Purion, Bosch Powertube 625Wh	

Geometria

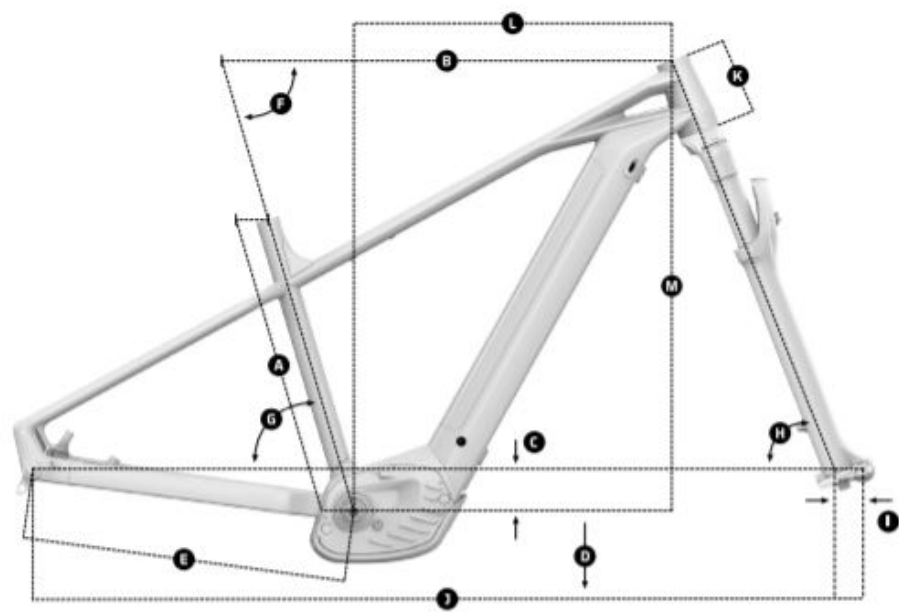

GEOMETRY

Size	XS	S	M	L	XL
A Seat Tube Length	380 mm	390 mm	430 mm	470 mm	510 mm
B Top Tube Length	600 mm	615 mm	645 mm	670 mm	700 mm
C Bottom Bracket Drop	-60 mm	-60 mm	-60 mm	-60 mm	-60 mm
D Bottom Bracket Height	318 mm	318 mm	318 mm	318 mm	318 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	69°	69°	69°	69°	69°
I Fork Offset	51 mm	51 mm	51 mm	51 mm	51 mm
J Wheelbase	1138mm	1153 mm	1183 mm	1210 mm	1240 mm
K Head Tube Length	110 mm	110 mm	110 mm	130 mm	130 mm
L Reach	410 mm	425 mm	455 mm	480 mm	505 mm
M Stack	640 mm	640 mm	640 mm	658 mm	658 mm

PRIME, BLACK/WHITE, 2021

obj. č.: 477686507



Odporúčaná cena


3.499,00 EUR

Technické špecifikácie

vyrábané veľkosti XS 380mm / S 390mm / M 430mm / L 470mm / XL 510mm	hmotnosť 21,9 Kg
rám Prime Xtralite 6061 Full Butted Alloy, Forward Geometry, internal removable battery, tapered head tube, Boost 12x148mm rear axle, integrated dropout speed sensor	vidlica RockShox Recon Silver RL 29, 120mm, Motion control, Solo Air, tapered steerer tube, Boost 15x110mm axle, 42mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload
hlavové zloženie Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45	prehadzovačka Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
radenie Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click	brzdové páčky Sram Level T, Direct Link actuation, tooled reach adjust, lever pivot bushings
kľučky Race Face Aeffect ebike, 165mm	riadidlá Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm
predstavec Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm barbare	sedlovka Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm
sedlo Mondraker e-MTB custom design	náboj predný Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts

náboj zadný Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts	reťaz Sram SX Eagle, 12s, Powerlock
kazeta Sram PG-1210, 11-50T, 12s	drôty CN round stainless steel
ráfiky MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes	plášte Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
obj.c. 010.21206	predná brzda Sram Level T, 2 piece caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pad
zadná brzda Sram Level T, 2 piece caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pad	plášť zadný Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
prevodník Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD	pätka k prehadzovačce Mondraker M068
motor + batérie Bosch Performance Line CX Cruise (25Km/h) GEN4, computer Bosch Purion, Bosch Powertube 625Wh	

Geometria

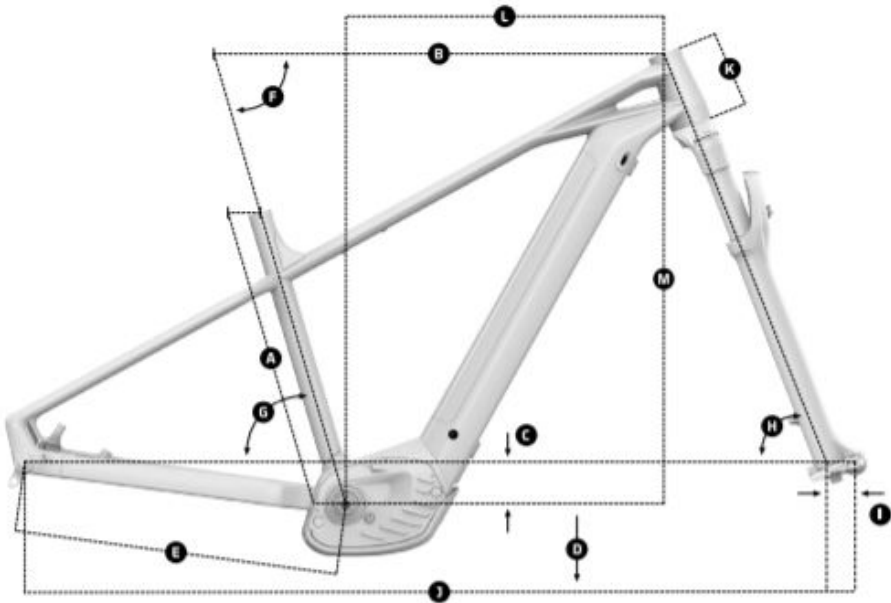

GEOMETRY

Size	XS	S	M	L	XL
A Seat Tube Length	380 mm	390 mm	430 mm	470 mm	510 mm
B Top Tube Length	600 mm	615 mm	645 mm	670 mm	700 mm
C Bottom Bracket Drop	-60 mm	-60 mm	-60 mm	-60 mm	-60 mm
D Bottom Bracket Height	318 mm	318 mm	318 mm	318 mm	318 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	69°	69°	69°	69°	69°
I Fork Offset	51 mm	51 mm	51 mm	51 mm	51 mm
J Wheelbase	1138mm	1153 mm	1183 mm	1210 mm	1240 mm
K Head Tube Length	110 mm	110 mm	110 mm	130 mm	130 mm
L Reach	410 mm	425 mm	455 mm	480 mm	505 mm
M Stack	640 mm	640 mm	640 mm	658 mm	658 mm